

Micro lubricator | BGO



Image shows:
92500.CC00



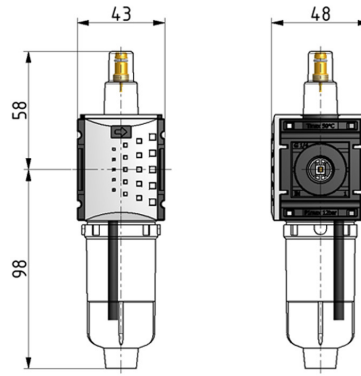


Image shows:
92500.CC00


flow characteristic



lubricator operating limit



symbol



technical data

description: micro lubricator
medium: compressed air, neutral gases
supply pressure P1 max.: 12 bar
temperature range: -10°C - +50°C
bowl: PC
mounting: vertical
bowl volume lubricator: 35 cm³
oil type: CL 32 DIN 51517 - ISO VG 32
dome assembly: PC
oil fill in: cannot be filled with oil during operation

accessories



mounting bracket:
[KBW.Q-1225](#)



coupling kit wall mounting:
[KKOP.QW](#)

type	part-number	description
KLUB-014	92500.CC00	Micro lubricator G1/4 with PC bowl
KLUB-014 M	92500.CC50	Micro lubricator G1/4 with metal bowl

Service 3 unit

Service 2 unit

Filter regulator

Filter

Pressure regulator

Lubricator

System extensions

Accessories

Special products