

Service 2 unit | BGO



Image shows:
92800.CC00



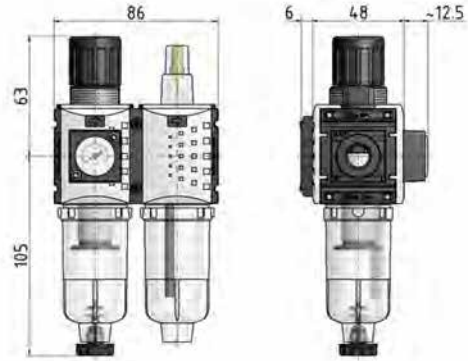


Image shows:
92800.CC00


flow characteristic



pressure characteristic



lubricator operating limit



symbol



technical data

description: sinter filter centrifugal principle, diaphragm-type pressure with relieving feature, micro mist lubricator
medium: compressed air, neutral gases
supply pressure P1 min.: 1,5 bar
supply pressure P1 max.: 12 bar
temperature range: -10°C - +50°C
bowl: PC
drain: HA
mounting: vertical
filter element: 5 µm
bowl volume lubricator: 35 cm³
oil metering qv=1.000l/min: 10 - 20 drops/min
oil type: CL 32 DIN 51517 - ISO VG 32

accessories



mounting bracket:
[KBW.0-1225](#)



coupling kit wall mounting:
[KKOP.0W](#)



control panel mounting:
[KBW.0-1227](#) + C.00-34

adapter for pressure gauge:
KKPS.0-54

type	part-number	description
KS2U-014/8 G	92800.CC00	Service 2 unit G1/4 0,5-8 5µm with PC bowl, semi automatic drain and integrated gauge
KS2U-014/8 AM G	92800.CC01	Service 2 unit G1/4 0,5-8 5µm with PC bowl, automatic drain and integrated gauge
KS2U-014/8 G M	92800.CC50	Service 2 unit G1/4 0,5-8 5µm with metal bowl, semi automatic drain and integrated gauge

Service 3 unit

Service 2 unit

Filter regulator

Filter

Pressure regulator

Lubricator

System extensions

Accessories

Special products