

Lubricator | BG4



Image shows:
92504.FF00



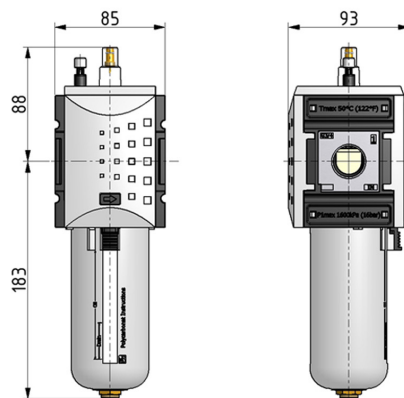


Image shows:
92504.FF00


flow characteristic

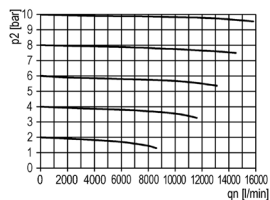

lubricator operating limit

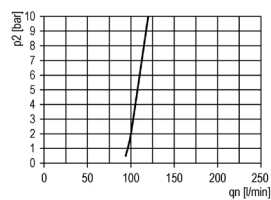

symbol



technical data

description: lubricator with automatic oil filling
medium: compressed air, neutral gases
supply pressure P1 max.: 16 bar
temperature range: -10°C - +50°C
bowl: PC with PA bowl guard
mounting: vertical
bowl volume lubricator: 181 cm³
oil type: CL 32 DIN 51517 - ISO VG 32
dome assembly: PC
oil fill in: can be oilpulling during operation

accessories



mounting bracket:
[KBW.4-1225](#)



coupling kit wall mounting:
[KKOP.4W](#)

electrical level indicator
(version addition: N)

type	part-number	description
KLUB-434	92504.FF00	Lubricator G3/4 with automatic oil filling, PC bowl and bowl guard
KLUB-434 H	92504.FF50	Lubricator G3/4 with automatic oil filling and metal bowl
KLUB-41	92504.GG00	Lubricator G1 with automatic oil filling, PC bowl and bowl guard
KLUB-41 H	92504.GG50	Lubricator G1 with automatic oil filling and metal bowl

Service 3 unit

Service 2 unit

Filter regulator

Filter

Pressure regulator

Lubricator

System extensions

Accessories

Special products